


High Speed Gravity Handler


ACTION A2 Series

Dual Site handler

More simple & More robust
More efficiency & More economy

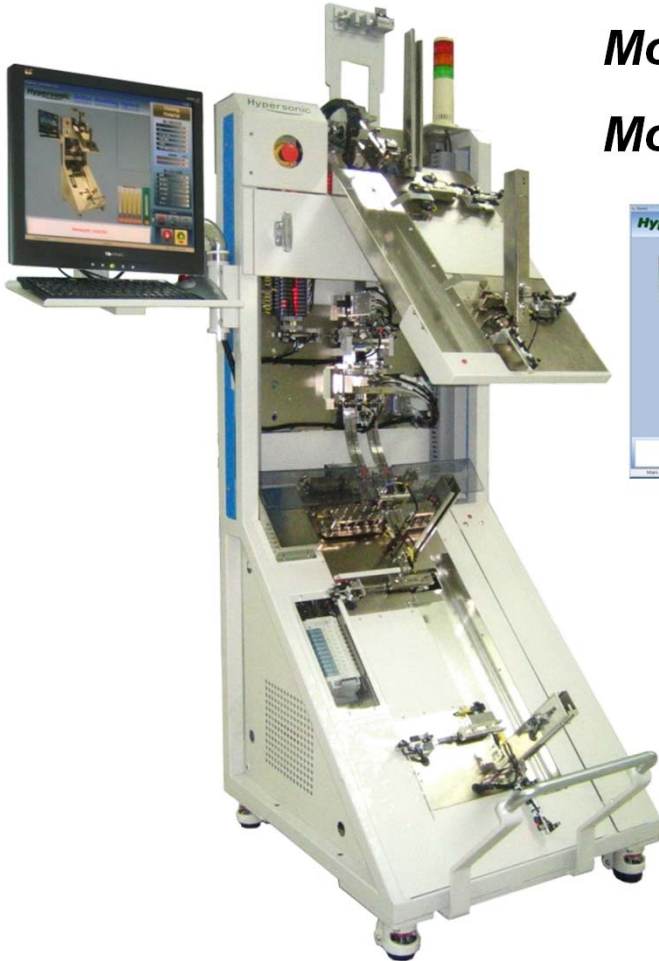

Applicable Package: SOP, SSOP, TSSOP
Test site : Dual site (Pitch 60mm)
Temperature mode : Ambient
Contact type : Standard (Short contact)
PTB(Long contact)

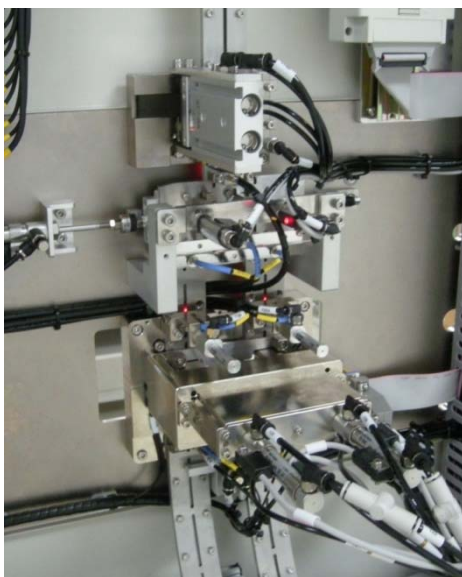

ACTION Handler

General Specification

Handler Model	Action Series (A2-150)
Applicable Packages	SOP,SSOP,TSSOP
Test site	Dual site
Temperature mode	Ambient
Contact type	Standard (Short contact), PTB(long contact)
Socket type	Kelvin, non-kelvin , 3rd party
Tube Auto Loader	Up to 40 tubes (SO150)
Tube Auto Unloader	Up to 40 tubes
Tube manual unloader	5 single tubes
UPH	See UPH Chart
Index Time (> 0.2 test time)	0.59 sec / single site ; 0.625 sec / dual site
Jam Rate	1/6000 pcs for SO150
Test Interface	TTL / RS232 / GPIB (option)
Contact Mode	Synchronous / Asynchronous
Weight	150Kg
Height	190 cm
Footprint	660mm x 750mm
Power Supply requirement	AC 220V, 50/60 Hz, Single Phase
Compressed Air Supply	5.5 to 6 Bars, Dry filter Air

UPH

A2-150 (14L) UPH chart

